11 Track lights and tracks SHOPLINE2

Quickinfo

LUMINAIRE

ceiling, wall installation in 3P-track aluminum, white/black IP20



LED

3000K, 4000K CRI>80 initial MacAdam 3 SDCM 50.000h L80

OPTIC

reflector 60°x70° opal wide

ELECTRIC

ON-OFF switchable












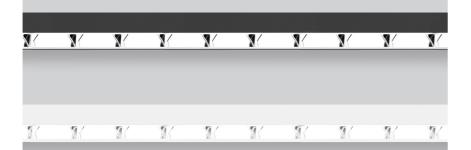

Description

Minimalist linear luminaire body for tool-free mounting in 3P tracks.

Optionally with reflector for targeted distribution or with opal cover for homogeneous wide-area illumination. Developed for the requirements of sales and presentation areas. Highly efficient light source with high colour rendering. LED control gear integrated in luminaire housing.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	OPTIC	COLOUR TEMP.	WEIGHT
SLS2030.1EX2X	30W	2.800lm	reflector	3000K / 4000K	- 1,0kg
SLS2030.1AC2X	30W	3.100lm	opal	3000K - 4000K adjustable	





Multicolou

WW NW CW

One luminaire, different colour temperatures

Different colour temperatures can be set using dip switches.

Optic





Smooth opal structure for soft illumination



Multi-chamber reflector for controlled light distribution

Optic





Dimension

